

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

<p>(51) International Patent Classification ⁶ : H04B 1/713</p>	<p>A2</p>	<p>(11) International Publication Number: WO 98/21834 (43) International Publication Date: 22 May 1998 (22.05.98)</p>
<p>(21) International Application Number: PCT/FI97/00688 (22) International Filing Date: 12 November 1997 (12.11.97) (30) Priority Data: 964550 13 November 1996 (13.11.96) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RAITOLA, Mika [FI/FI]; Avaruuskatu 3 I 170, FIN-02210 Espoo (FI). SILVENTOINEN, Marko [FI/FI]; PSR 9 D 125, FIN-00530 Helsinki (FI). (74) Agent: PATENTTITOIMISTO TEKNOLOGIS KOLSTER OY; Kolster OY AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).</p>		<p>(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).</p> <p>Published Without international search report and to be republished upon receipt of that report.</p>

(54) Title: FREQUENCY HOPPING METHOD AND RADIO SYSTEM

(57) Abstract

The invention relates to a frequency hopping method and a radio system. Frequency hopping is implemented downlink to the frequency of the broadcast control channel. The radio system comprises a network part (100), a subscriber terminal (102) and a radio connection (104) as the transmission path. The novelty is that the broadcast control channel does not usually perform frequency hopping. The simplest implementation of the system is a software modification in the network part (100) and the subscriber terminal (102). The invention can be applied to all radio systems using frequency hopping, particularly to the GSM/DCS 1800 systems and the UMTS system.

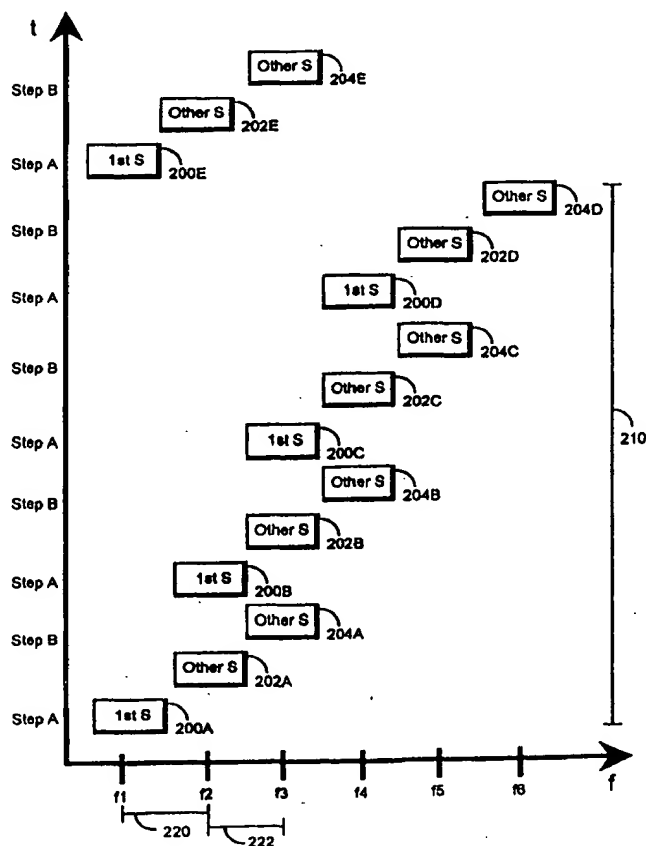

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

FREQUENCY HOPPING METHOD AND RADIO SYSTEM

FIELD OF THE INVENTION

The invention relates to a method of implementing downlink frequency hopping to the frequency of a broadcast control channel in a radio system comprising a network part, a subscriber terminal and a radio connection as the transmission path between the network part and the subscriber terminal.

BACKGROUND ART

Frequency hopping was developed for military radio systems to complicate eavesdropping and to eliminate interference. In eliminating interference it should be noted that frequency diversity and interferer diversity are achieved by frequency hopping. Frequency hopping is implemented by a transmitter transmitting a given amount of radio information at a given frequency. The transmitter then continues to transmit radio information at another frequency. The frequency can be changed several times. Usually the frequency is changed as a known series, and this is called a frequency hopping sequence.

In radio systems, each base station has one carrier, called a broadcast channel. The term control channel may also be used. In fact, the term refers to several channels used by a subscriber terminal and the network part for controlling their operations. Downlink broadcast channels are called broadcast control channels. In addition to these, the same carrier is used to transmit the actual traffic channels, on which user payload, such as speech or data, are transferred after a connection has been established. When needed, signalling data may also be transported within traffic channels.

The term channel is used in two different meanings. In this representation, a channel refers to a logical channel containing data characteristic of it. The second meaning of a channel refers to a physical channel used for carrying the logical channel. In this representation, a physical channel is called a time slot.

In the GSM system, one physical channel is one time slot of a TDMA frame. Logical channels are common channels or dedicated channels. A TDMA frame comprises 8 time slots. A 26-multiframe of the length of 26 TDMA frames has been defined for dedicated channels. Similarly, a 51-multiframe of the length of 51 TDMA frames has been defined for common

channels.

The common channels comprise BCH channels (Broadcast Channel) and CCCH channels (Common Control Channel). The BCH channels comprise a FCCH channel (Frequency Correction Channel), a SCH channel (Synchronization Channel) and BCCH channels (Broadcast Control Channel). The CCCH channels comprise a PCH channel (Paging Channel), an AGCH channel (Access Grant Channel) and RACH channels (Random Access Channel). The dedicated channels comprise traffic channels and DCH channels (Dedicated Control Channel). The DCH channels comprise an SDCCH channel (Stand-alone Dedicated Control Channel), an SACCH channel (Slow Associated Control Channel) and an FACCH channel (Fast Associated Control Channel).

As to the present invention, the essential channels are the broadcast control channels, including the FCCH channel, SCH channel, BCCH channels and CCCH channels (the PCH and AGCH channels). The FCCH channel comprises frequency correction information for a subscriber terminal. The SCH channel comprises frame synchronization information. The BCCH channel comprises general base station-dedicated information. Of the CCCH channels, the PCH channel comprises call information and the AGCH channel information about the allocation of a traffic channel to a subscriber terminal.

The broadcast control channel is transmitted at full transmitter power and at the same frequency, i.e. frequency hopping cannot be utilized. This causes problems to planning and using a radio system.

The major problem is double network planning. At first, the use of normal carriers is planned. It can be enhanced by frequency hopping, discontinuous transmission and power control. Secondly, the use of the carriers of the broadcast control channels is planned.

Another major problem is that the capacity of the system reduces as the traffic channels that are on the same carrier as the broadcast control channel cannot utilize frequency hopping, discontinuous transmission and power control.

SUMMARY OF THE INVENTION

It is the object of the present invention to implement frequency hopping to the frequency of the broadcast control channel, the method avoiding the presented problems.

This is achieved with the method described in the preamble, char-

acterized in that the method comprises the following steps:

A) the network part transmits on the broadcast control channel a first signal group to the subscriber terminal at a given frequency, the first signal group stating at which second frequency the first signal group will be transmitted the next time,

B) the network part then transmits on the broadcast control channel a known number of other signals to the subscriber terminal using frequency hopping, and the offset of the first frequency hop has been agreed in advance, and the offsets of the other frequency hops are agreed in advance,

C) step A is entered, the network part transmitting the following first signal group to the subscriber terminal at a second frequency,

D) steps A to C are repeated, the frequency hopping sequence being formed of a given number of steps A to C.

The invention also relates to a system for implementing downlink frequency hopping to the frequency of a broadcast control channel in a radio system comprising a network part, a subscriber terminal and a radio connection as the transmission path between the network part and the subscriber terminal.

The system is characterized in that the network part is adapted to transmit on the broadcast control channel a first signal group to the subscriber terminal at a given frequency, the first signal group stating at which second frequency the first signal group will be transmitted the next time, and to transmit on the broadcast control channel other signals to the subscriber terminal using frequency hopping, the offset of the first frequency hop being agreed in advance, and the offsets of the other frequency hops being agreed in advance; the subscriber terminal is adapted to generate a frequency hopping sequence of the transmission frequencies of the first signal group, the offset of the first frequency hop and the offsets of the other frequency hops.

The method of the invention provides a plurality of advantages. The performance of all channels on the carrier of the broadcast control channel improves significantly as frequency hopping can be used.

A significant advantage is gained by network planning becoming much easier. Double network planning is no longer needed, as all the channels transmitted by the network part are able to utilize frequency hopping. It is even possible that cell frequency planning does not have to be carried out at all: the base station randomly selecting a frequency hopping sequence.

Should some neighbouring base stations use the same frequencies, frequency hopping ensures that the performance remains sufficiently good.

The system of the invention has the same advantages as described above in connection with the method. The preferred embodiments of the invention and the other more detailed embodiments emphasize the advantages of the invention. It is obvious that the preferred embodiments and the more detailed embodiments can be combined to different combinations to achieve the desired technical power.

DESCRIPTION OF THE DRAWINGS

10 In the following the invention will be described in more detail with reference to examples in accordance with the attached drawings, in which

Figure 1 shows a radio system,

Figure 2 shows the implementation of frequency hopping in accordance with the invention,

15 Figure 3 shows a manner of implementing frequency hopping in the GSM system,

Figure 4 shows a second manner of implementing frequency hopping in the GSM system,

20 Figure 5 shows a third manner of implementing frequency hopping in the GSM system,

Figure 6 shows an example of the system.

DESCRIPTION OF THE PREFERRED EMBODIMENTS

Figure 1 shows the parts of a radio system essential to the invention. The radio system comprises a network part 100 and a subscriber terminal 25 102. A radio connection 104 between the network part 100 and the subscriber terminal 102 constitutes the transmission path. In practice a radio system comprises hundreds, even thousands of base stations and numerous subscriber terminals.

30 Figure 2 shows frequencies f1 to f6 on the X axis and time on the Y axis. The frequency hopping method of the invention is implemented as follows:

A) The network part 100 transmits on the broadcast control channel a first signal group 200A to the subscriber terminal 102 at frequency f1. The signal group 200 refers to an entity formed by one or more single signals. The 35 first signal group 200A states at which second frequency the first signal group

200B will be transmitted the next time.

B) The network part 100 then transmits on the broadcast control channel a given number of other signals 202A, 204A to the subscriber terminal 102 using frequency hopping. The number of the other signals 202, 204 may be one or more, in this example the number is two. The first other signal 202A is transmitted at frequency f2 and the second other signal 204A at frequency f3. The offset 220 of the first frequency hop, i.e. the offset of the frequency from frequency f1 to frequency f2 has been agreed in advance, i.e. it is known both to the subscriber terminal and the network part. The offsets 222 of the other frequency hops, i.e. in this example the offset of frequency f2 to frequency f3, have also been agreed in advance.

C) The network part 100 then transmits the next first signal group 200B to the subscriber terminal 102 at a second frequency f2 which was stated in the previous first signal group 200A. The other signals 202B, 204 are then transmitted at frequencies f3 and f4.

D) The steps A to C are repeated, the frequency hopping sequence 210 being formed of a given number of steps A to C. In this example, the frequency hopping sequence 210 is thus f1-f2-f3-f2-f3-f4-f3-f4-f5-f4-f5-f6. The frequency hopping sequence 210 is then resumed from the start.

The subscriber terminal 102 learns the frequency hopping sequence by listening to frequencies. When it finds a first signal group 200, it starts to follow the chain by tuning to the frequency given by the first signal group 200. Having followed the chain for some time, the subscriber terminal 102 observes its repetition, and the subscriber terminal 102 has thus learned the frequency hopping sequence.

In a preferred embodiment of the invention, the first signal group 200 also states the offset 220 of the first frequency hop. The advantage gained by this is that the offset does not have to be a default value agreed in advance, but can be adapted to best suit the circumstances.

In a second preferred embodiment, the first signal group 200 states at which at least two other frequencies the first signal group 200 will be transmitted at least the next and the following time. Thus the subscriber terminal 102 does not lose the entire frequency hopping sequence 210, even if it fails to hear the next first signal group 200.

Let us next study the implementation of the invention in the GSM system without, however, restricting the invention to this system. It is obvious

that the invention can be implemented in various radio systems using frequency hopping, e.g. the enhanced GSM system, the DCS1800 system, and the UMTS system. In the GSM system, the first signal group 200 comprises at least one FCCH signal and at least one SCH signal. The other signals 202, 5 204 comprise the BCCH signals and/or the CCCH signals. A typical structure of a 51-multiframe is such that time slot 0 comprises the common channels and time slots 1 to 7 the dedicated channels. Regarding the invention, it is essential to study how the common channels in the time slot 0 frequency hop, as prior art solutions can be applied to the dedicated channels in the time slots 1 10 to 7, the frequency hopping sequence being notified to these channels in the BCCH channel.

Figure 3 shows how the method is implemented in the GSM system. The X axis again shows frequencies f1 to f6. The Y axis shows the time, in this case as the number 0 to 50 of the time slot zero of the 51-multiframe as 15 order numbers of zero 0 to 50. The first signal group is first transmitted at frequency f1. The group consists of three signals, including a FCCH channel and two SCH channels. Usually there is only one SCH channel, but in this embodiment of the invention one CCCH channel has been replaced by one SCH channel. Next, four BCCH signals are transmitted, at frequencies f2, f3, f4, and 20 f5. Three CCCH signals are then transmitted at frequencies f6, f1, and f2. The next first signal group is then transmitted at frequency f2, followed by 7 CCCH signals at frequencies f3, f4, f5, f6, f1, f2, and f3. This group of a FCCH signal, two SCH signals and seven CCCH signals is still repeated twice in the frequency hopping sequence 210 of this example. Nothing is transmitted in the 25 time slot zero of the last 51-multiframe. As mentioned above, the second SCH signal states at which second frequency the first signal group, i.e. one FCCH signal and two SCH signals, will be transmitted the next time.

An embodiment of the invention does not need an extra SCH signal; instead the first SCH signal states at which second frequency the first 30 signal group, i.e. one FCCH signal and two SCH signals, will be transmitted the next time. The advantage of this is that the division of existing time slots does not have to be changed. This embodiment of the invention is shown in Figure 4. The frequency hopping sequence 210 is repeated as shown in Figure 3, the difference being that there is only one SCH signal, the number of 35 CCCH signals not having to be decreased.

Figure 5 shows an embodiment of the invention in which the FCCH

signal is always transmitted at a given frequency in order to improve frequency synchronization. The FCCH signal is consequently left outside the frequency hopping. Figure 5 shows how the FCCH signal is always transmitted at frequency f1. The Figure shows two SCH signals as does Figure 3, but it is obvious that this embodiment can also be combined with the embodiment of Figure 4, the number of SCH signals being only one.

The SCH signal comprises the BSIC (Base Station Identity Code) and the TDMA frame number. In accordance with the embodiment shown in Figure 3, the first SCH signal comprises the TDMA frame number, and the second SCH signal the BSIC and the frequency of the first signal group to be transmitted next. In accordance with the embodiment shown in Figure 4, the SCH signal comprises the BSIC and the frequency of the first signal group to be transmitted next.

The downlink frequency hopping sequence is also used for common uplink channels, e.g. the RACH channels in the GSM system.

The invention also relates to a radio system for implementing the method. The network part and the subscriber terminal are adapted to carry out the method of the invention. In accordance with Figure 1, the essential parts of the system are the network part 100 and the subscriber terminal 102 with a radio connection 104 between them. The network part comprises a base station, a base station controller and a mobile telephone exchange. Figure 6 shows an example of how the system is adapted to carry out the necessary procedure. The base station controller 600 is in connection with the base station 610. The base station controller 600 comprises a group switching field 602, a transcoder 604 and a control unit 606. The group switching field 602 is used to switch speech and data and to connect signalling circuits. The transcoder 604 converts the different digital speech encoding forms used between a public switched telephone network and a mobile communication network into a form suitable for one another. The control unit 606 carries out call control, mobility management, collecting statistical data, and signalling. The base station 610 comprises a frame unit 612, a frequency hopping unit 614, a carrier unit 616 and an antenna 618. The frame unit 612 is used for channel encoding, channel interleaving, data encryption and burst generation. The frequency hopping unit 614 is used for frequency hopping to the base band carrier. The carrier unit 616 performs modulation and A/D conversion on a signal to be transmitted. The subscriber terminal 102 comprises an antenna 620, a

duplex filter 622, a receiver 624 and a control part 626. The receiver 624 comprises a demodulator 628, a channel decoder 630, a decrypter 632 and a source decoder 634.

The way to employ the method is for the base station 610 to transmit on the broadcast control channel a first signal group 200 to the subscriber terminal 102 at a given frequency, the first signal group 200 stating at which second frequency the signal group 200 will be transmitted the next time. The base station additionally transmits on the broadcast control channel other signals 202, 204 to the subscriber terminal 102 using frequency hopping, the offset 220 of the first frequency hop being agreed in advance, and the offsets 222 of the other frequency hops being agreed in advance. The simplest way to implement the invention is to convert the steps of the method of the invention into executable software. The software can then be placed e.g. in the memory of the control part 606 of the base station controller 600. The control part 606 then signals to the base station 610 that the necessary data be placed in the frame unit 612 to the channel to be transmitted. The frequency hopping unit 614 is also signalled how it has to implement the frequency hopping sequence. The means can also be implemented by general of signal processors or by discrete logic.

The subscriber terminal 102 forms the frequency hopping sequence 210 of the transmission frequencies of the first signal group 200, the offset 220 of the first frequency hop, and the offsets 222 of the other frequency hops. The simplest way to implement the invention is for the steps of the method of the invention to be converted into executable software. In this way the software can be stored in the memory of the control part 626 and be executed in the same control part 626, the software receiving the necessary information from the receiver 624. The implementation can also be carried out by general or signal processors or by discrete logic.

Even though the invention has been explained in the above with reference to the example in accordance with the accompanying drawings, it is obvious that the invention is not restricted to it but can be modified in various ways within the scope of the inventive idea disclosed in the attached claims.

CLAIMS

1. A method of implementing downlink frequency hopping to the frequency of a broadcast control channel in a radio system comprising a network part (100), a subscriber terminal (102) and a radio connection (104) as the transmission path between the network part (100) and the subscriber terminal (102), **characterized** in that the method comprises the following steps:

A) the network part (100) transmits on the broadcast control channel a first signal group (200) to the subscriber terminal (102) at a given frequency, the first signal group (200) stating at which second frequency the first signal group (200) will be transmitted the next time,

B) the network part (100) then transmits on the broadcast control channel a known number of other signals (202, 204) to the subscriber terminal (102) using frequency hopping, and the offset (220) of the first frequency hop has been agreed in advance, and the offsets (222) of the other frequency hops are agreed in advance,

C) step A is entered, the network part (100) transmitting the following first signal group (200) to the subscriber terminal (102) at a second frequency,

D) steps A to C are repeated, the frequency hopping sequence (210) being formed of a given number of steps A to C.

2. A method as claimed in claim 1, **characterized** in that the offset (220) of the first frequency hop is also stated in the first signal group (200).

3. A method as claimed in claim 1, **characterized** in that the first signal group (200) states at which at least two other frequencies the first signal group (200) will be transmitted at least the next and the following time.

4. A method as claimed in claim 1, **characterized** in that the downlink frequency hopping sequence is also used for common uplink channels.

5. A method as claimed in any one of the preceding claims, **characterized** in that in the GSM system the first signal group comprises at least one FCCH signal and at least one SCH signal.

6. A method as claimed in any one of the preceding claims, **characterized** in that in the GSM system the other signals comprise the BCCH signals and/or CCCH signals.

7. A method as claimed in claim 5, **characterized** in that the first SCH signal states at which second frequency the first signal group (200) will be transmitted the next time.

8. A method as claimed in claim 5, **characterized** in that the
5 second SCH signal states at which second frequency the first signal group (200) will be transmitted the next time.

9. A method as claimed in claim 5, **characterized** in that the FCCH signal is always transmitted at the same given frequency.

10. A method as claimed in claim 7, **characterized** in that
10 the present SCH signal comprises the BSIC and the TDMA frame number, and that in accordance with the invention, the SCH signal comprises the BSIC and the frequency of the first signal group to be transmitted the next time.

11. A method as claimed in claim 8, **characterized** in that
15 the present SCH signal comprises the BSIC and the TDMA frame number, and that in accordance with the invention, the SCH signal comprises the TDMA frame number, and the second SCH signal comprises the BSIC and the frequency of the first signal group to be transmitted the next time.

12. A system for implementing downlink frequency hopping to the frequency of a broadcast control channel in a radio system comprising a net-
20 work part (100), a subscriber terminal (102) and a radio connection (104) as the transmission path between the network part (100) and the subscriber terminal (102), **characterized** in that the network part is adapted

to transmit on the broadcast control channel a first signal group (200) to the subscriber terminal (102) at a given frequency, the first signal
25 group (200) stating at which second frequency the first signal group (200) will be transmitted the next time, and

to transmit on the broadcast control channel other signals (202, 204) to the subscriber terminal (102) using frequency hopping, the offset (220) of the first frequency hop being agreed in advance, and the offsets (222) of the
30 other frequency hops being agreed in advance;

the subscriber terminal (102) is adapted to generate a frequency hopping sequence (210) of the transmission frequencies of the first signal group (200), the offset (220) of the first frequency hop and the offsets (222) of the other frequency hops.

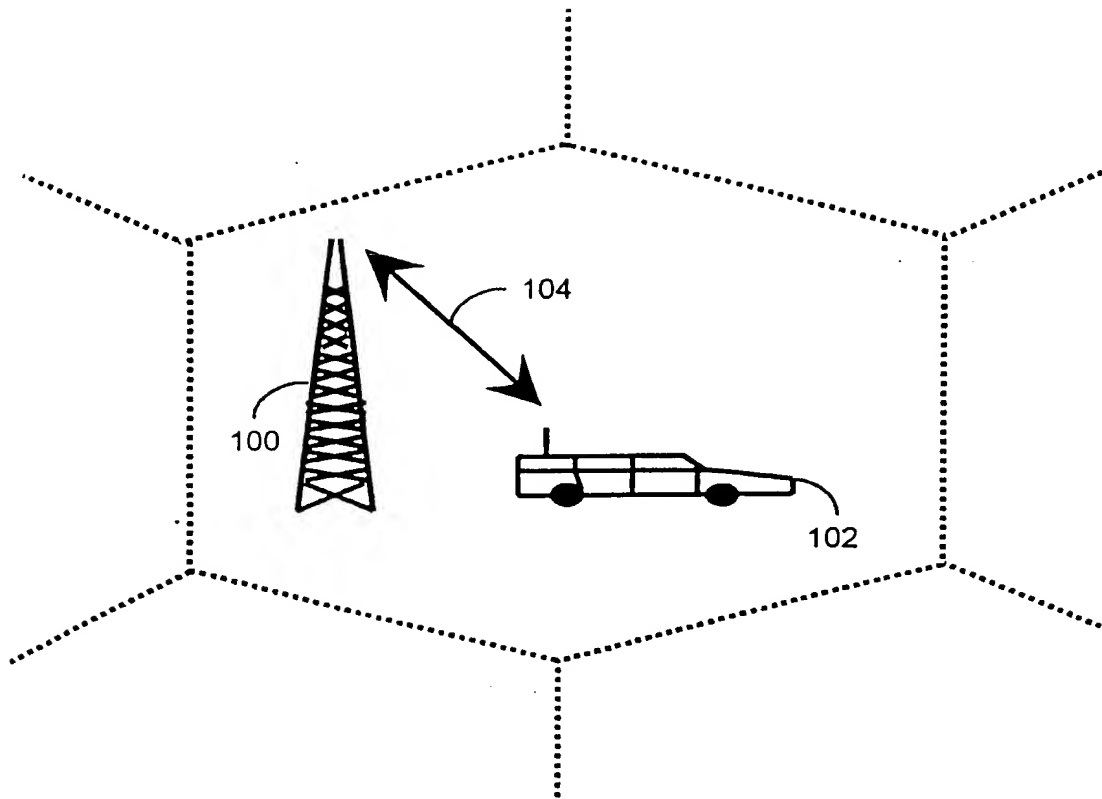


Fig 1

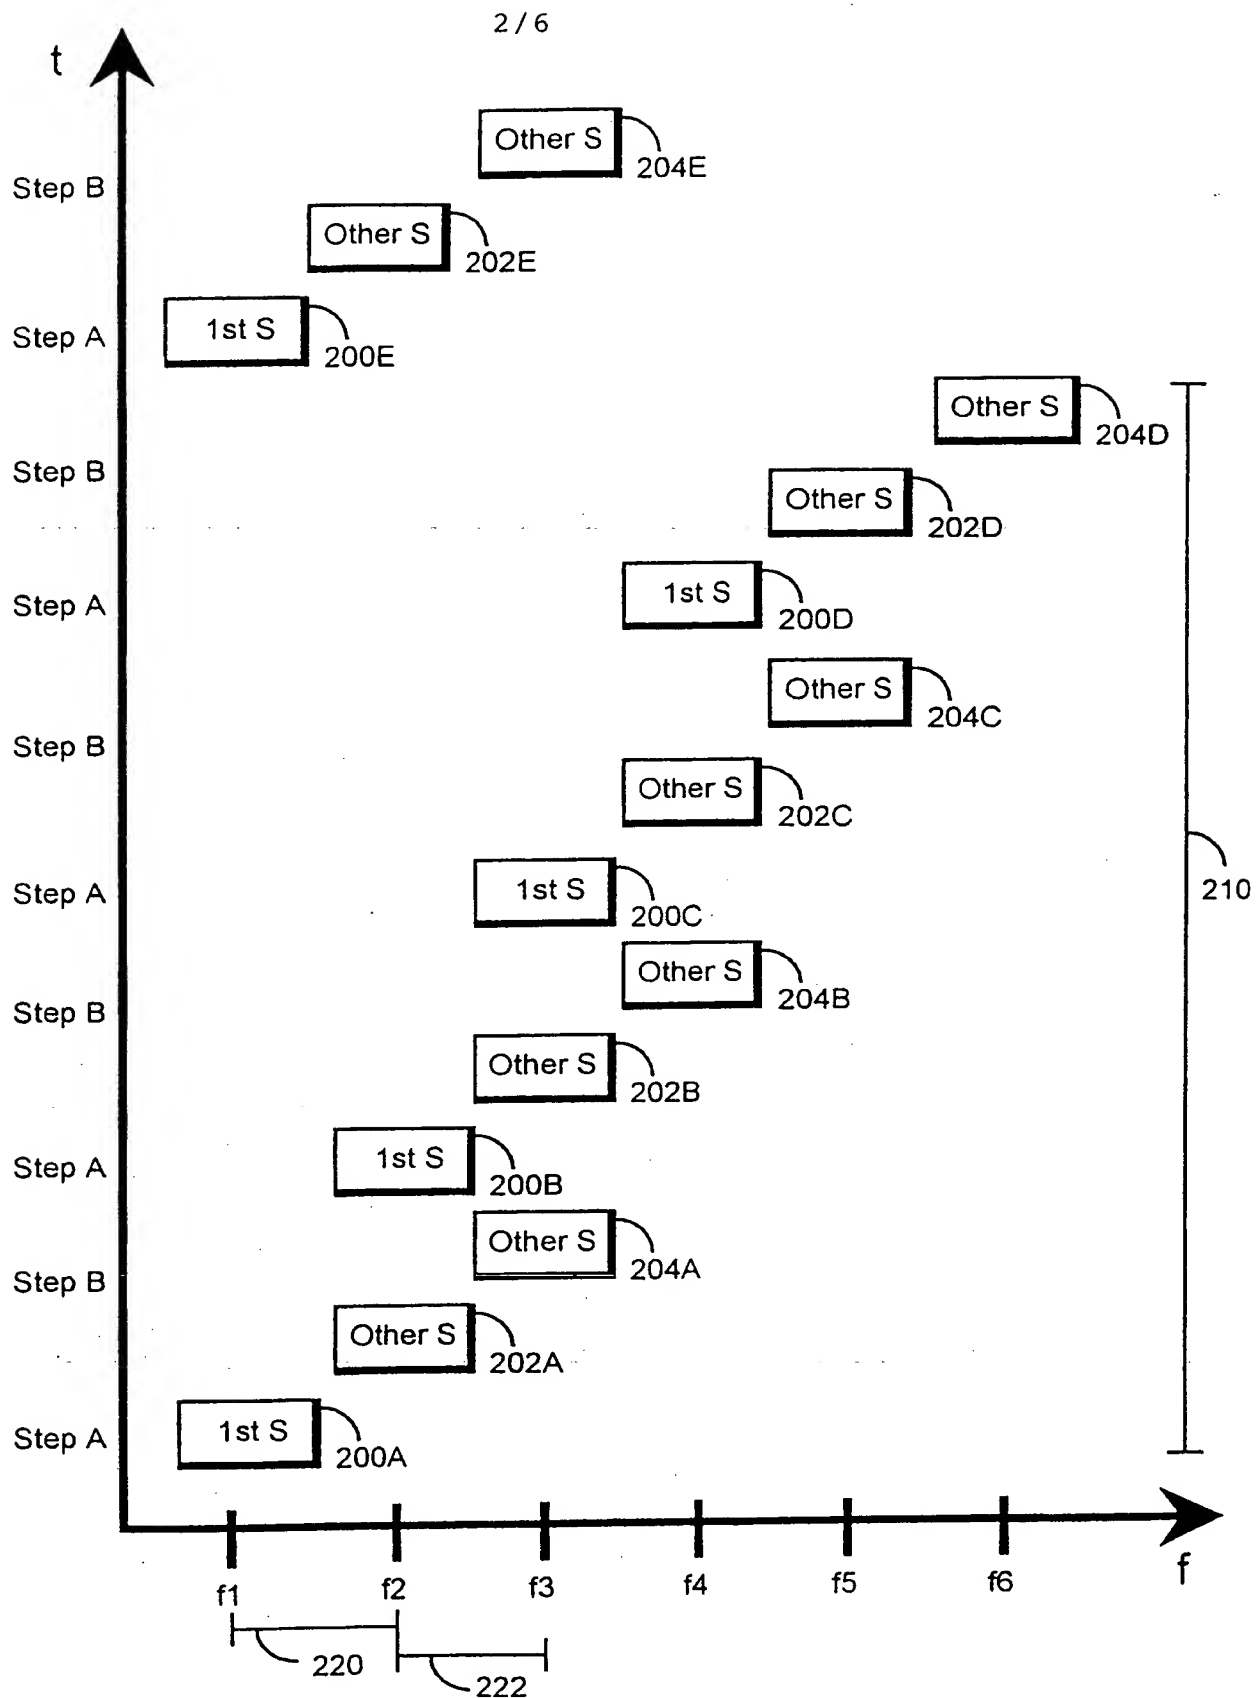


Fig 2

3/6

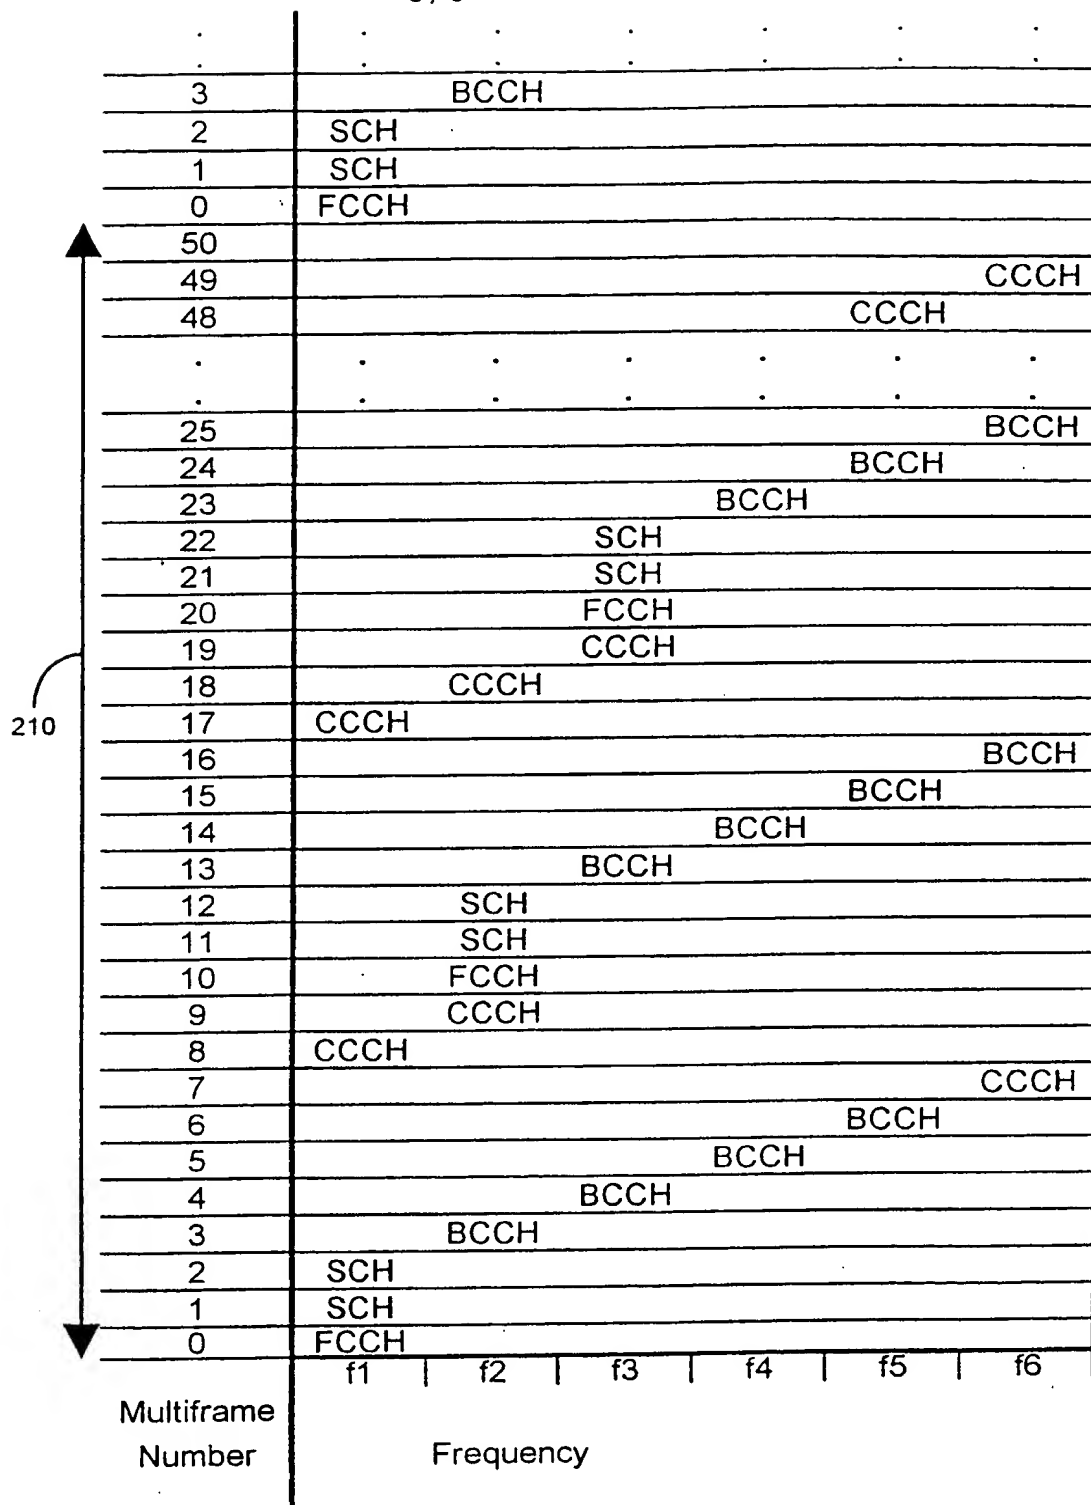


Fig 3

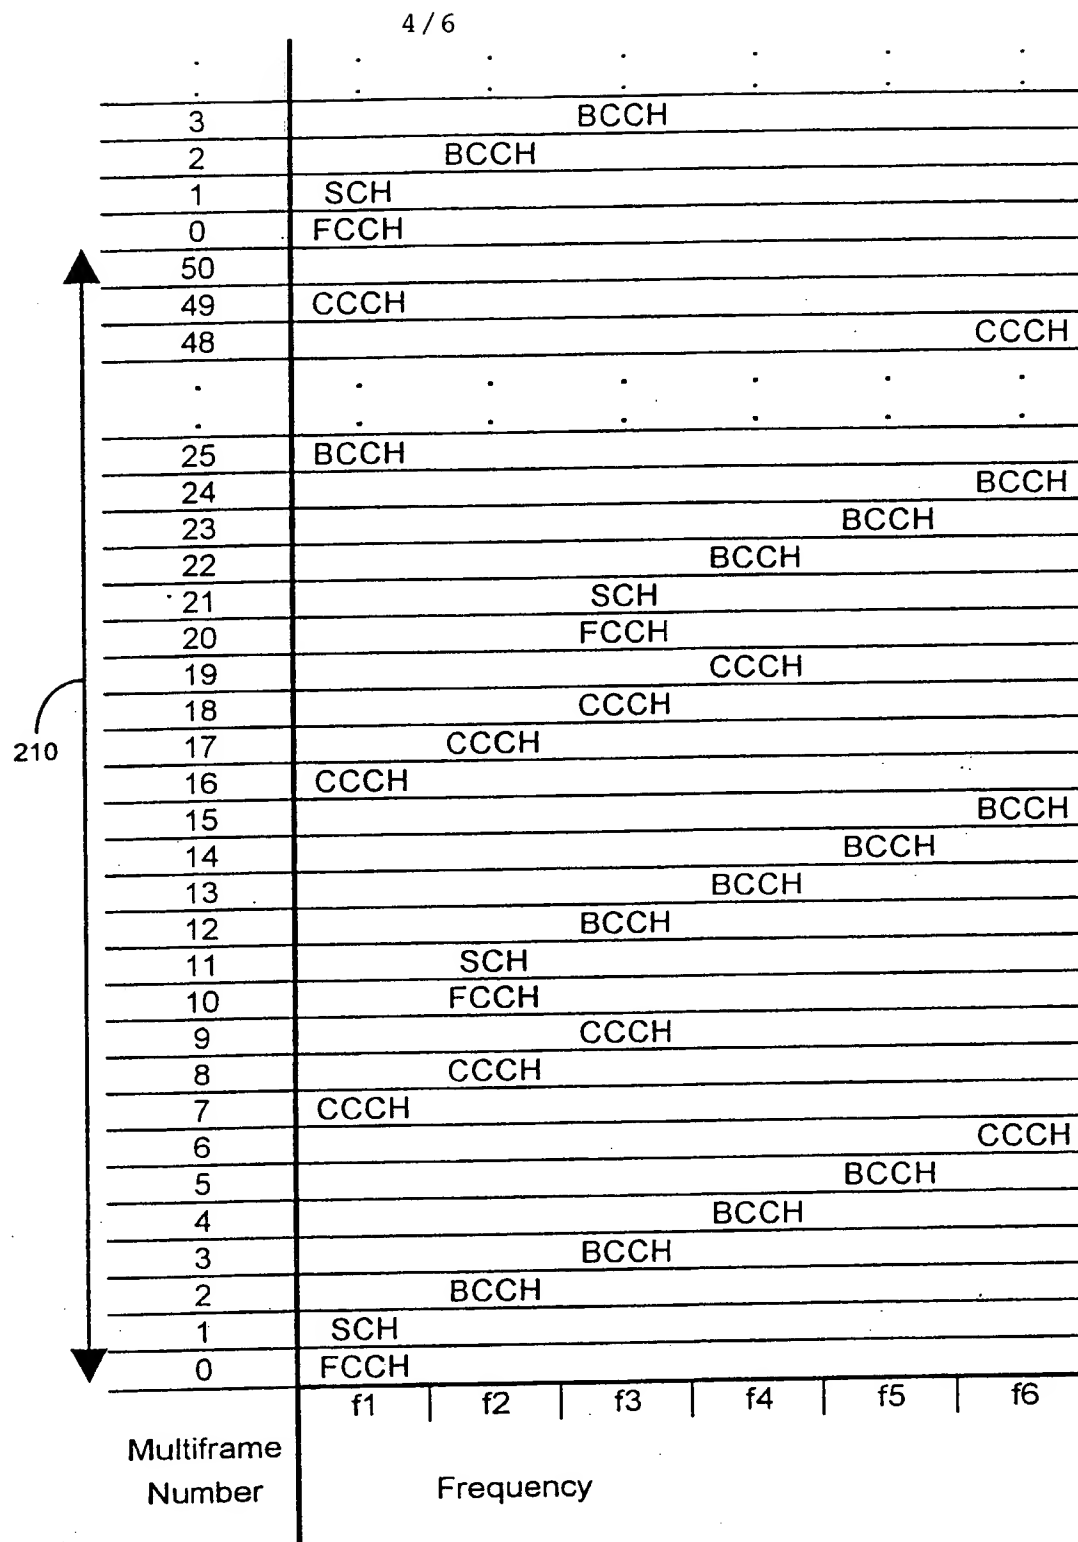


Fig 4

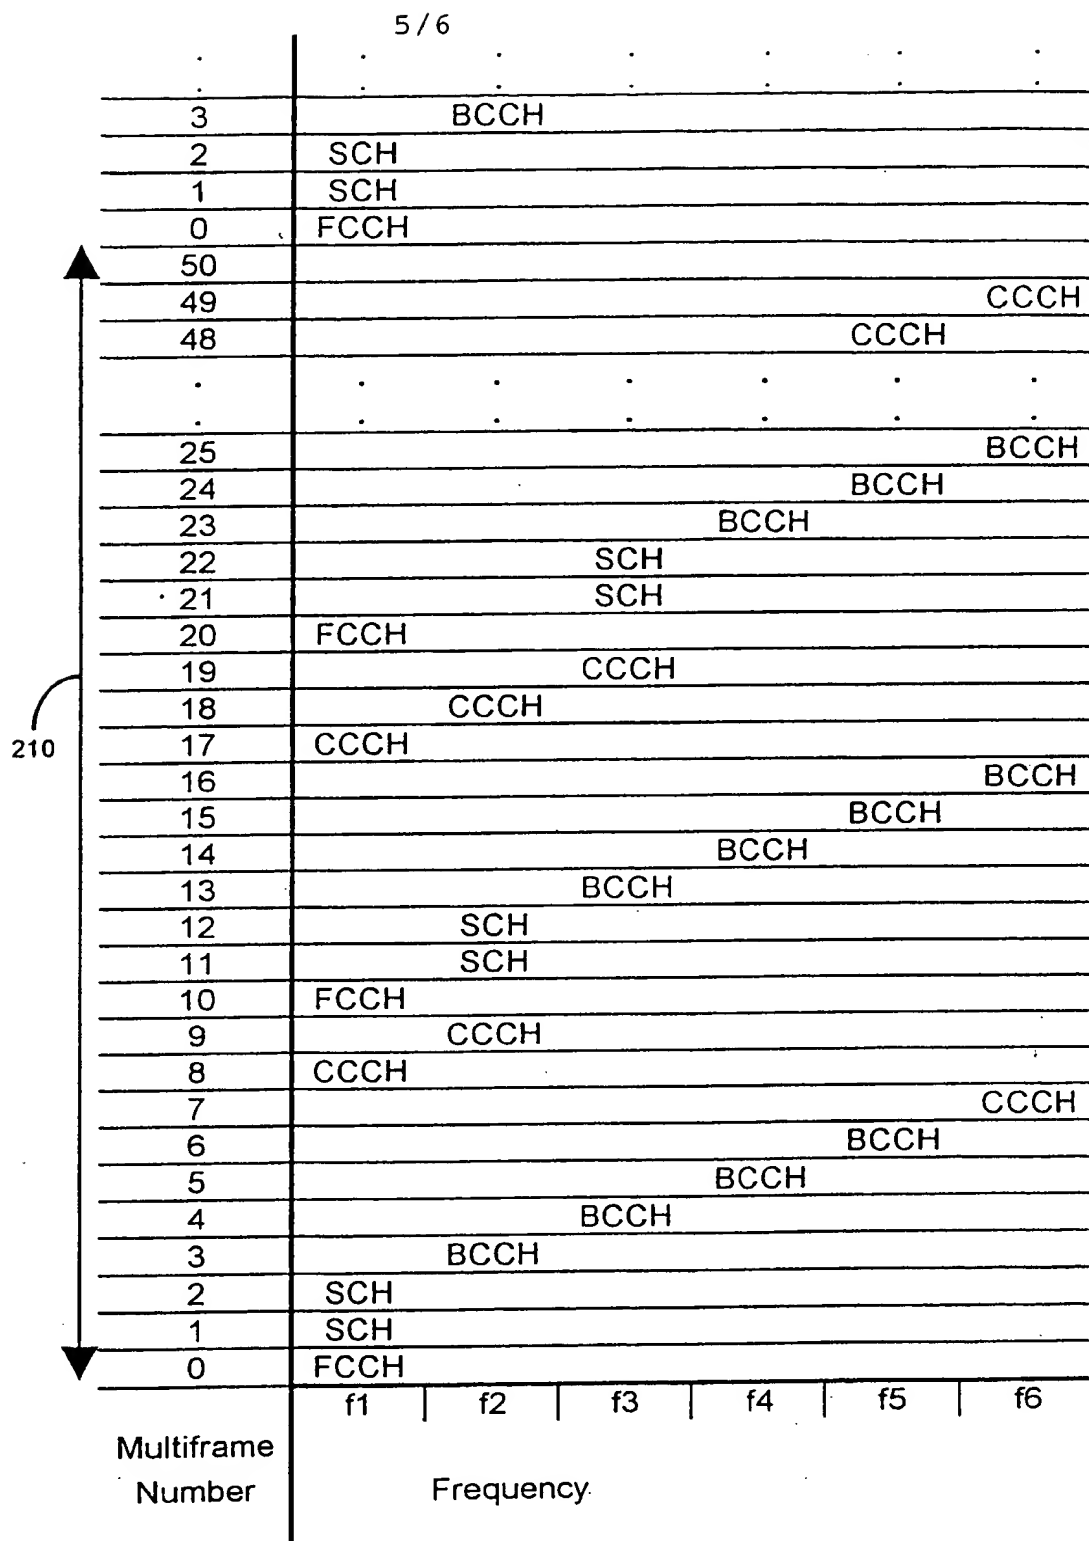


Fig 5

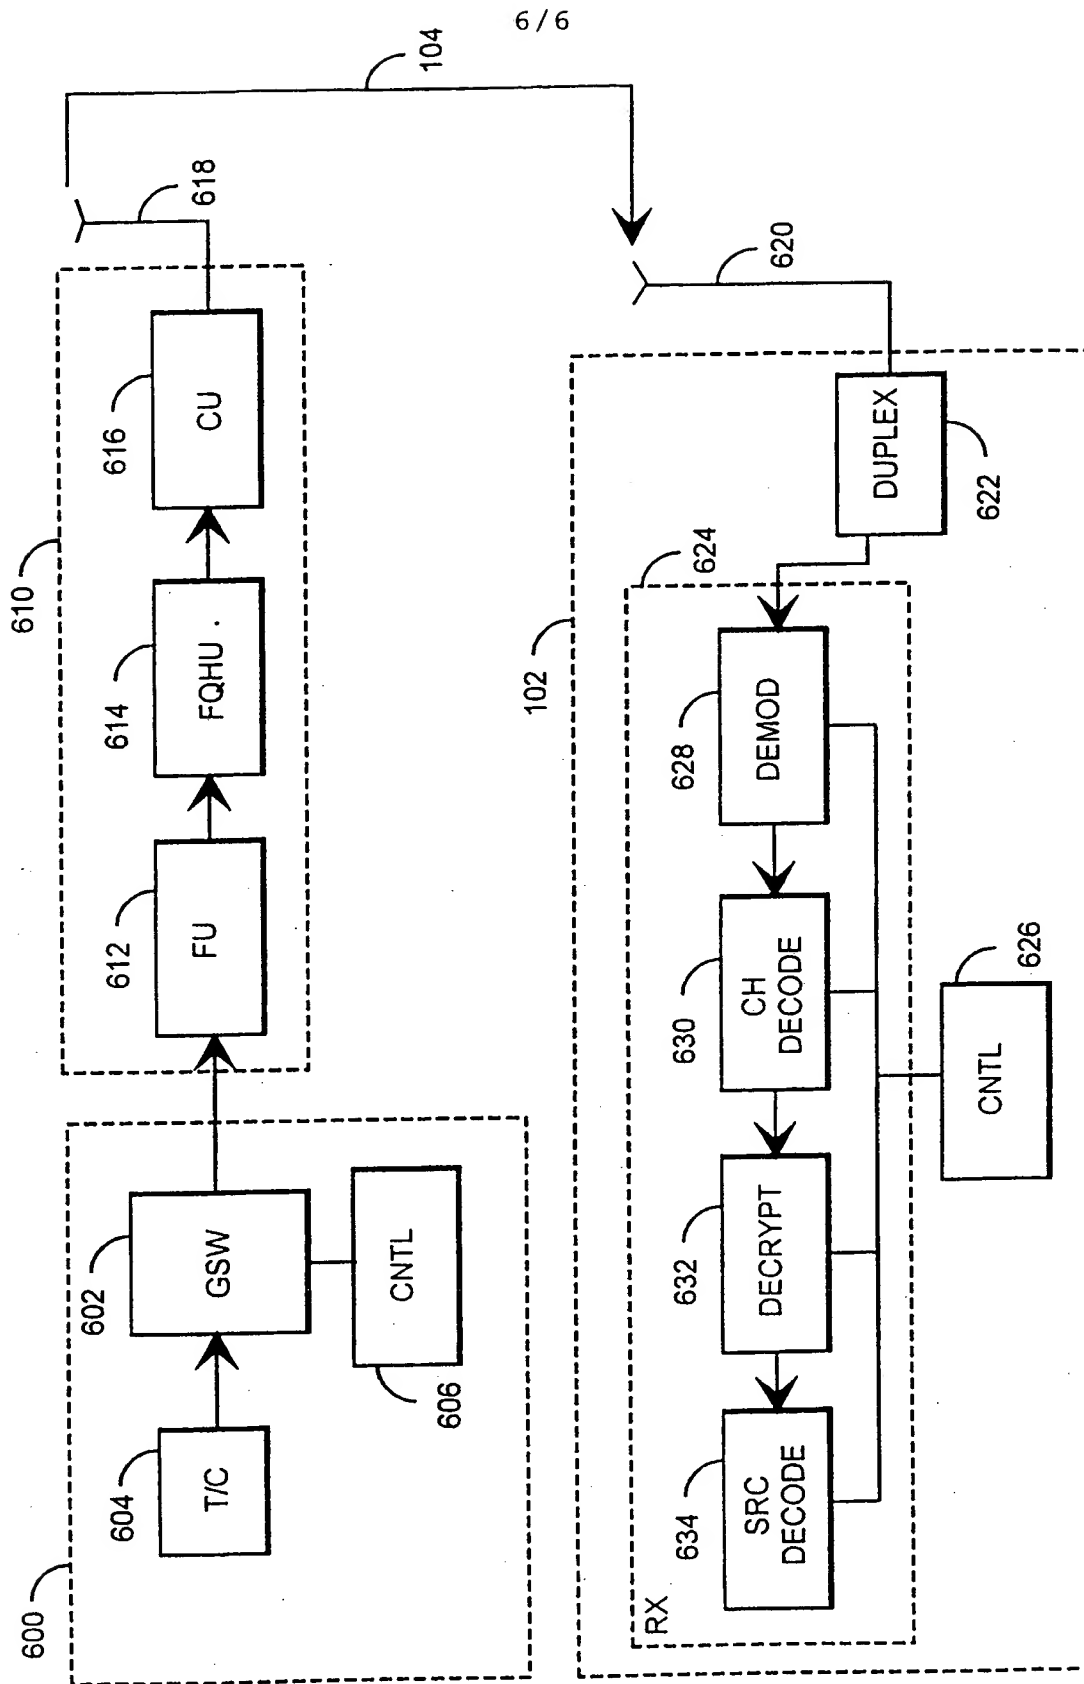


Fig. 6




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04B 1/713	A3	(11) International Publication Number: WO 98/21834 (43) International Publication Date: 22 May 1998 (22.05.98)
(21) International Application Number: PCT/FI97/00688 (22) International Filing Date: 12 November 1997 (12.11.97) (30) Priority Data: 964550 13 November 1996 (13.11.96) FI (71) Applicant (for all designated States except US): NOKIA TELECOMMUNICATIONS OY [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI). (72) Inventors; and (75) Inventors/Applicants (for US only): RAITOLA, Mika [FI/FI]; Avaruuskatu 3 I 170, FIN-02210 Espoo (FI). SILVENTOINEN, Marko [FI/FI]; PSR 9 D 125, FIN-00530 Helsinki (FI). (74) Agent: PATENTTITOIMISTO TEKNOPOLOIS KOLSTER OY; Kolster OY AB, Iso Roobertinkatu 23, P.O. Box 148, FIN-00121 Helsinki (FI).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published <i>With international search report.</i> <i>Before the expiration of the time limit for amending the claims and to be republished in the event of the receipt of amendments.</i> (88) Date of publication of the international search report: 25 June 1998 (25.06.98)

(54) Title: FREQUENCY HOPPING METHOD AND RADIO SYSTEM**(57) Abstract**

The invention relates to a frequency hopping method and a radio system. Frequency hopping is implemented downlink to the frequency of the broadcast control channel. The radio system comprises a network part (100), a subscriber terminal (102) and a radio connection (104) as the transmission path. The novelty is that the broadcast control channel does not usually perform frequency hopping. The simplest implementation of the system is a software modification in the network part (100) and the subscriber terminal (102). The invention can be applied to all radio systems using frequency hopping, particularly to the GSM/DCS 1800 systems and the UMTS system.

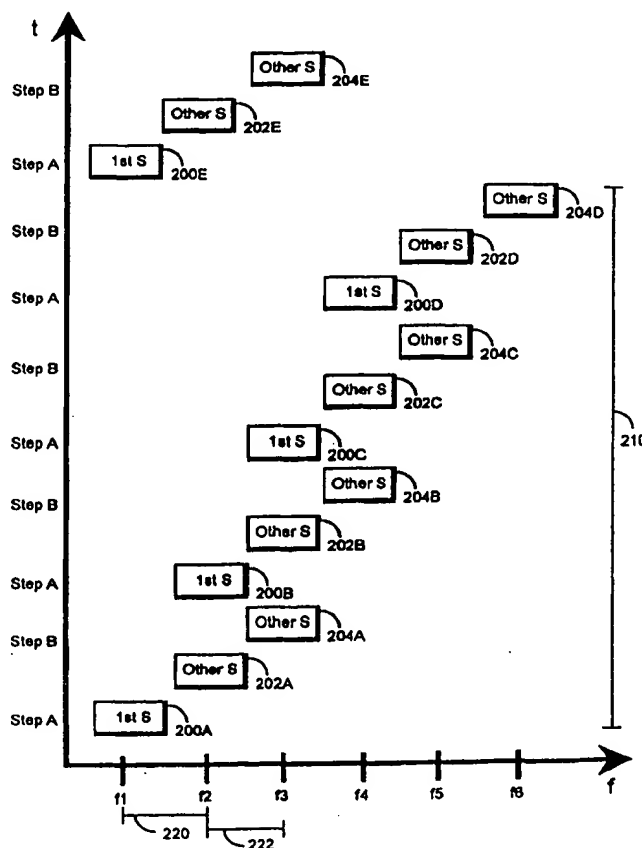

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LI	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00688

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: H04B 1/713

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	1997 IEEE 47th Vehicular Technology Conference, Volume 3, May 1997, (Phoenix, Arizona, USA), Fredric Kronestedt et al, "FREQUENCY PLANNING STRATEGIES FOR FREQUENCY HOPPING GSM" page 1862 - page 1866 --	1-12
A	WO 9322849 A1 (NOKIA TELECOMMUNICATIONS OY), 11 November 1993 (11.11.93), page 10, line 10 - line 29, figure 3, abstract --	1-12
A	WO 9624200 A1 (NOKIA MOBILE PHONES LTD.), 8 August 1996 (08.08.96), abstract --	1-12

☒ Further documents are listed in the continuation of Box C.☒ See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed
- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

11 May 1998

Date of mailing of the international search report

12 -05- 1998

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

MIKAEL SOLLERHED
Telephone No. +46 8 782 25 00

Form PCT/ISA/210 (second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 97/00688

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	<p>WO 9526040 A2 (NOKIA TELECOMMUNICATIONS OY), 28 Sept 1995 (28.09.95), abstract</p> <p style="text-align: center;">-- -----</p>	1-12

Form PCT/ISA/210 (continuation of second sheet) (July 1992)

INTERNATIONAL SEARCH REPORT

Information on patent family members

29/04/98

International application No.

PCT/FI 97/00688

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO 9322849 A1	11/11/93	AU 671282 B	22/08/96
		AU 4262893 A	29/11/93
		EP 0639312 A	22/02/95
		FI 97838 B,C	15/11/96
		FI 922046 A	07/11/93
		JP 7506472 T	13/07/95
		NO 944217 A	03/01/95
		US 5570352 A	29/10/96
WO 9624200 A1	08/08/96	AU 4261896 A	21/08/96
		DE 19546577 A	01/08/96
		FI 2191 U	21/11/95
		FI 99066 B,C	13/06/97
		FI 950419 A,V	01/08/96
		FR 2730117 A	02/08/96
		GB 2297669 A	07/08/96
		GB 9525966 D	00/00/00
		NL 1001927 A	00/00/00
		SE 506999 C	16/03/98
		SE 9504541 A	01/08/96
WO 9526040 A2	28/09/95	AU 1952095 A	09/10/95
		CN 1127575 A	24/07/96
		EP 0699342 A	06/03/96
		FI 941289 A	19/09/95
		JP 8510627 T	05/11/96
		NO 954665 A	17/01/96
		US 5719857 A	17/02/98

THIS PAGE BLANK (USPTO)